






# ALLIED INSULATED PANELS

PRODUCT DATA SHEET

# WALL PANELS

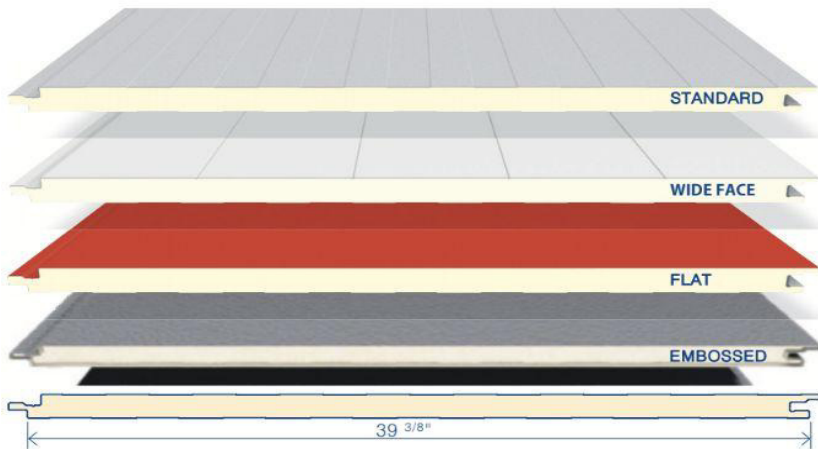

TECHNICAL SPECIFICATIONS						
Panel Thickness	1.5"	2"	2.5"	3"	4"	5
U - Value	.89	.072	.059	.043	.034	.028
R - Value	11	14	17	23	29	35
Useable width	39 3/8"					
Length	Up to 39 ft.					
Metal facings	GAUGE 26 / 24 / 22					
	G-90 galvanized or AZ50 aluminum-zinc					
Coatings	Polyester, PVDF (other coatings available)					
Metal surface	Standard / Wide Face / Flat / Embossed					
Type of core	Polyisocyanurate (PIR) 2.3 PCF Density					
TEST	TEST METHOD					
Fire	ASTM E 84					
Strength	ASTM E 8					
Wind Uplift	ASTM E 330					
Water penetration	ASTM E 331					
Permeability	ASTM E 2140					

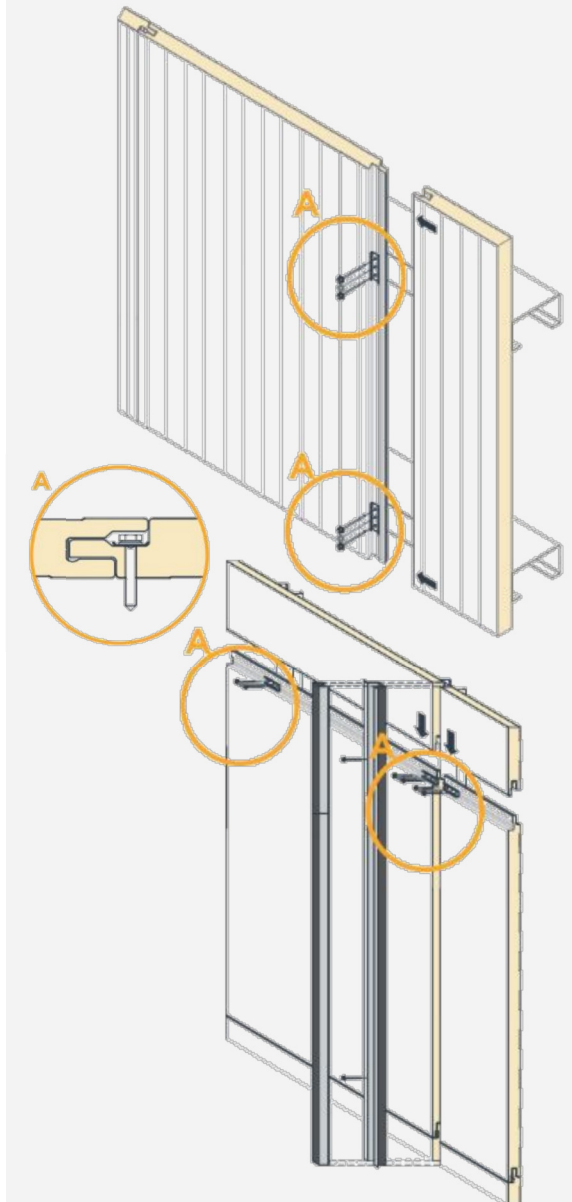

412-722-0550



metalbuildinginsulationplus.com