





# Diamond Door Products LTD

## Thermal Break Frame Aluminum Windows

Thermal break frame aluminum windows are designed for metal building applications and have a commercial rating of C25 (HS), and heavy commercial of HC40 (fixed). These windows have a thermal break in the main frame to eliminate the conductivity of heat/cold from the outside to the inside and thus eliminating condensation or frost build up from occurring on the frame. Windows can be installed directly onto the wall panel with fins to match the panel profile, or be installed in a framed opening. Standard window features:

- 5/8" Insulated clear glass in sliders and 1" insulated glass in the fixed style—5 year warranty against seal failure
- 6063-T5 extruded aluminum frame and
- Frame separated by poured in place polyurethane thermal barrier
- Baked-on enamel finish—white or bronze
- Various fins for metal wall panel installation
- Universal fin system for framed openings—with optional preassembled subframe system

### *Subframe System / Framed Opening*

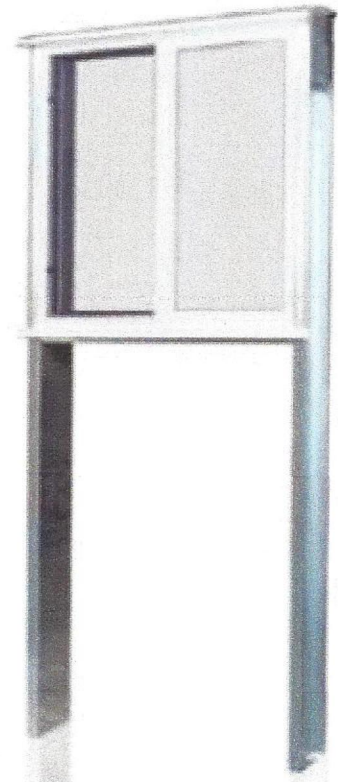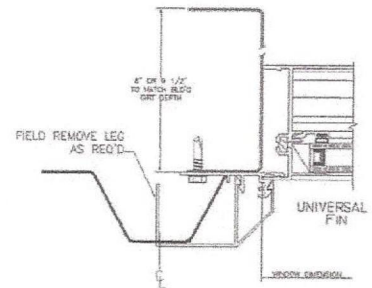

### *R Panel and A Panel Wall Installation*

